

5000 N SERIES ROTARY JOINTS



HIGH SPEED
 Hydraulic Oil, Pressure Water
 1/4" (DN08) - 1" (DN25)


- Single flow
- Self supported
- Silicon carbide sealing
- Double way ball bearing (No lubricate)
- Drainage holes
- Stainless steel back cover & shaft
- Anti-corrosion components

* Do not dry run !


Working Conditions

Max. Hydraulic Oil	:	5.800 PSI	400 Bar
Max. Water Pressure	:	5.800 Psi	400 Bar
Max. Rpm	:	1.500 RPM	1.500 rpm/min
Max. Temperature	:	90 °C	

5000 N Series 1/4" (DN08) - 1" (DN25) Single Flow Rotary Joints



180° Axial Connection

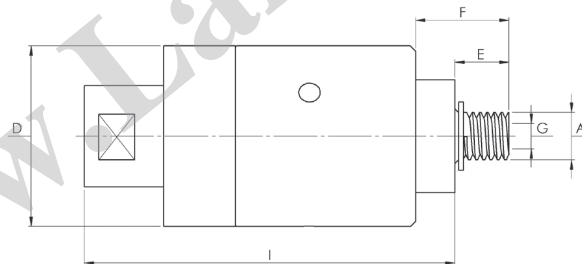

* Custom sized manufacturing are available.

5000N SERIES ROTARY JOINT - 1/4"(DN08) - 1"(DN25)

Size DN	B Inlet	Model No	A	D	I	E	F	G	Kg
8	1/4"	N5025-136-202	1/4" BSP - RH	50	118	15	26	7	1,00
		N5025-136-203	1/4" BSP - LH						
10	3/8"	N5037-136-204	3/8" BSP - RH	50	118	15	26	10	1,00
		N5037-136-205	3/8" BSP - LH						
15	1/2"	N5050-136-206	1/2" BSP - RH	50	122	20	30	12	1,25
		N5050-136-207	1/2" BSP - LH						
20	3/4"	N5075-136-208	3/4" BSP - RH	96	161	24	44	18	4,30
		N5075-136-209	3/4" BSP - LH						
25	1"	N5100-136-210	1" BSP - RH	96	161	24	44	24	4,30
		N5100-136-211	1" BSP - LH						